

DRB 30 - 35 hp
DRB IVR 30 - 35 hp

Solid, simple, smart: Advanced reliability in compressed air







User benefits

Simple Installation

- Compact and all in one system, thanks to the oversized integrated dryers.
 Compressed air quality can be improved by the cyclonic water separator and the coalescent filter is available as an option.
- Innovative design
- Easy and fully protected transport
- No special foundation needed

Solid Quality

Outstanding and first-class components:

- Highly reliable transmissions, for a quiet and trouble-free operation.
- High capacity oil/air coolers, perfect air filtration and cooling guarantee less thermal shocks and a longer lifetime.
- Overload protection and full automatic control.
- High quality and heavy duty motor.

Easy Maintenance and Accessibility

- All service components are located at the front of the machine for excellent accessibility, you just have to open the frontal door for an easy access for service or cleaning, easy access of the coolers, oil filter, separator and air filter replacements.
- Oil-level eye at the front
- Easy and quick check thanks to service door and controller
- Service and cleaning is a one person job

Saving of costs

- Lower energy consumption thanks to IE3 motors or IVR technology
- Optimal efficiency, lubrication and cooling
- Long service intervals

Safety

- Emergency stop
- Protection grid
- IP 54 electrical cubicle
- Internal and external protection for the electric fan.

DRB 30-35 Gear driven DRB 30-35 IVR Direct driven

Compressed air drives your company. Consequently, choosing the right compressor is crucial. Going for our DRB and DRB IVR ranges of highly efficient and flexible oil-injected screw compressors is a choice you will not regret. Bring some fresh air into your company and enjoy the strong performance and high efficiency that come with it.

The new DRB IVR closely follows the air demand by automatically adjusting the motor speed. Combined with the innovative design of direct driven transmission, this results in average energy savings of 35% and an average cut of 25% in the lifecycle cost of a compressor.

>>> Optional and standard features

OPTIONS LIST	Factory	Sales
OIL 8000H		
CANOPY HEATER		
FOOD GRADE OIL		
OPTION ENERGY RECOVERY		
HEAVY DUTY INLET FILTER	std on 30 and 37 kW	std on 30 and 37 kW
COALESCENCE FILTER OPTION 0,1 ppm residual oil content	(with dryer)	(with dryer)
WATER SEPARATOR DRAIN (WSD) + automatic drain		
PHASE SEQUENCE RELAY	std	std
TROPICAL THERMOSTAT	std	std
WOODEN PACKAGE		
ES 4000 advanced controller		
Main isolator SWITCH		
Silencing baffle		

= available = not available



YOUR ENERGY EFFICIENT AND SOLID PERFORMANCE

DRB 30 - 35 gear driven
DRB 30 - 35 IVR direct driven




DRB 35 D



>>> Energy audit

A frequency driven compressor potentially offers a very energy efficient compressed air installation, with a return on investment of typically 1-2 years. To help you decide to go with a frequency driven compressor or not, Ceccato has created the Energy Cutter, a tool which calculates in an easy way and visually presents the yearly savings that can be obtained from investing in a frequency driven compressor for any specific industry. Besides the Energy Cutter tool, Ceccato offers energy audits, specialized advice to make sure you make the right decision when buying your compressor.





TECHNICAL DATA



>>> Fixed speed

FIX SPEED	Max. Working Pressure	Reference Working Pressure	Moto	r Power		e Air Delivery (rence conditio			Cooling Air flow	Weight		
		0	1	b		=		Þ	=	FM	FM D	
Model	BAR	PSI	kW	hp	m ³ /h	l/s	cfm	dB(A)	m³/h	<u> </u>	kg	
	7,5	109			232	65	137	68	2300	445	520	
DRB 30*	8,5	123	22	30	219	61	129					
DKB 30"	10	145	22	30	199	55	117	08	2300	445		
	13	189			172	48	101					
	7,5	109			271	75	160		4800	460		
DRB 35	8,5	123	26	25	258	72	152	69			525	
UKD 33	10	145	26	35	236	66	139	09			535	
	13	189			205	57	120					

 $^{^{\}ast}$ Available only 400 V 50Hz - IEC - CE

>>> Variable speed

VARIABLE SPEED	Min. working pressure	Max. working pressure	Motor _I	oower	Free Air Delivery @ reference conditions										Noise level	Cooling air flow		
					Min F	AD*				Max. I	FAD *							
Model	BAR / PSI	BAR / PSI	100		7 bar		5 bar		7 bar		10 bar 12,5 bar		•	4	FM	FM D		
			kW	hp	m ³ /h	l/s	m ³ /h	l/s	m ³ /h	l/s	m ³ /h	/s	m ³ /h	l/s	dB(A)	m ³ /h		kg
DRB 30 IVR*	5,5-80	13-188	22	30	46	13	250	69	243	68	211	59	176	49	68	2300	434	503
DRB 35 IVR	5,5-80	13-188	26	35	46	13	290	81	277	77	247	59	205	57	69	4800	444	513

 $^{^{\}ast}$ Available only 400 V 50Hz - IEC - CE

>>> Dimensions

	DIMENSIONS									
Model	width mm	height mm	length IVR mm	length IVR + dryer mm						
DRB 30 DRB 35	830	1555	1320	1320						



SMART TECHNICAL ADVANTAGES








CUSTOMIZE YOUR MACHINES THROUGH A WIDE RANGE OF OPTIONS:

- Energy recovery to recover energy and reduce your energy bill
- Canopy heaters for low temperature installation



ES 4000 AS STANDARD
ES 4000 ADVANCED AS OPTION
FOR ALL THE MODELS

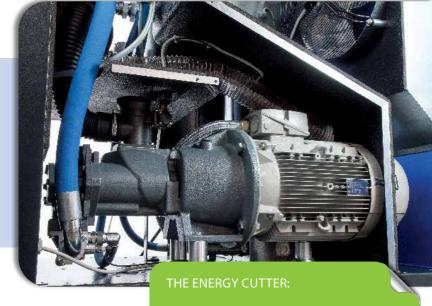

The new direct driven IVR version grants very low specific energy requirements and one of the widest turndowns of its category.



VERY BIG AIR OIL COOLER AND OPTIMIZED AIR FLOW

grant a very efficient cool down. Standard filtration panel extending service intervals. Air and oil filters and the oil vessel are easy to reach from the main door making serviceability very easy and fast.

Oil injected screw compressors, gear and direct driven

DRB and DRB IVR





- A high quality product offering you technology you can trust.
- Our products are easy to use and guarantee high reliability.
- Distributors are always nearby ensuring availability of both products and support.
- Choosing our high performance products entails a partnership that will boost your business.
- Safeguarding long-term productivity through optimal serviceability and use of original parts.



Care. Trust. Efficiency.

Care

Care is what service is all about: professional service by knowledgeable people, using high-quality original parts.

Trust.

Trust is earned by delivering on our promises of reliable, uninterrupted performance and long equipment lifetime.

Efficiency.

Equipment efficiency is ensured by regular maintenance. Efficiency of the service organization is how Original Parts and Service make the difference.

of their respective owners. Our products are constantly being developed and improved. We thus reserve the right to modify product specifications © 2015, Ceccato. All rights reserved. All mentioned brands, product names, company names, trademarks and service marks are the properties without prior notice. Pictures are not contractually binding